

12

EUROPEAN PATENT APPLICATION

21 Application number: 87109868.7

51 Int. Cl.: H 02 P 9/04, H 02 P 9/10

22 Date of filing: 08.07.87

30 Priority: 11.07.86 JP 163458/86

71 Applicant: Kabushiki Kaisha Toshiba, 72, Horikawa-cho
 Saiwai-ku, Kawasaki-shi Kanagawa-ken 210 (JP)

43 Date of publication of application: 20.01.88
 Bulletin 88/3


72 Inventor: Uchino, Hiroshi, 615, Yokokawa-Cho,
 Hachioji-Shi Tokyo-To (JP)
 Inventor: Shimamura, Takeo, 1994-469, Hazama-Machi,
 Hachioji-Shi Tokyo-To (JP)

84 Designated Contracting States: CH DE FR GB LI SE

74 Representative: Behn, Klaus, Dipl.-Ing., Patentanwalt
 Lindenberg 34, D-8134 Pöcking bei München (DE)

54 Induction machine system.

57 An induction system of the invention is adapted to apply coordinate transformation to the excitation current reference vector corresponding to the primary interlinkage magnetic flux vector reference value and the primary current vector so that they exist in the same coordinate system, thereafter to control the secondary current vector so that the primary interlinkage magnetic flux vector is in correspondence with the primary interlinkage magnetic flux vector, thereby allowing the primary side of the wound-rotor induction machine to function apparently as a voltage source.

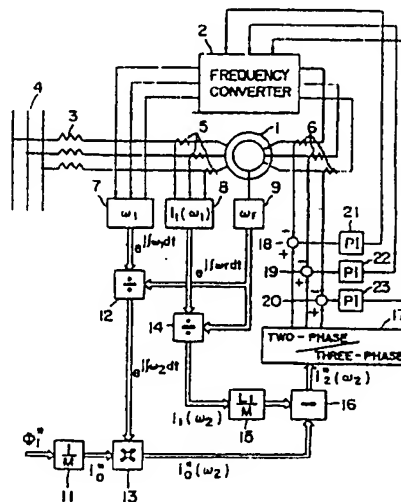

INDUCTION MACHINE SYSTEM

BACKGROUND OF THE INVENTIONTechnical field of the invention

5 The present invention relates to an induction machine system including therein a wound-rotor induction machine for controlling the secondary current vector to perform a secondary excitation control.

Prior art

10 In the wind-power generation, for the purpose of converting a wind energy to an electric energy so that the wind energy becomes maximum with respect to changes of a wind velocity or force, adjustable-speed running corresponding to the wind velocity is conducted.
15 Moreover, in the water-power generation, running is conducted at a rotation speed where the efficiency of a water turbine becomes maximum with respect to changes of water head or changes of the load, thereby making it possible to perform high efficiency running. In
20 addition, in such a case that a generator is directly coupled to the shaft of a propeller of the ship to effect power generation, the adjustable-speed power generation is strongly required. For one of such adjustable-speed generation systems, there is known a system to control
25 the secondary current of the wound-rotor induction machine using a frequency converter to effect a control such that the frequency of the primary side is kept constant even if the rotation speed changes, which is so called the "secondary excitation system". Because this
30 system advantageously permits the capacity of the converter to be reduced, it is especially suitable for large capacity power generation plant.

 The voltage control apparatus based on the secondary excitation system of the wound-rotor induction machine of
35 this kind has been already proposed (See Figs. 3. 2. 11, page 96, research paper BMFT-FB-T84-154(1), by Bundesministerium fuer Forschung und Technologie in West

Germany). In this apparatus, the primary winding of the wound-rotor induction machine is connected to the system. The frequency converter comprised of a cycloconverter is connected to the secondary winding, thereby conducting the secondary current control. Namely, three-phase command values of the secondary current are delivered to the frequency converter. These command values are compared with detection values of the secondary current, thus to effect a control such that the detection values are always equal to the command values. In addition, the primary current is detected with it being divided or separated into the current component in phase with the primary voltage and the current component lagging it by a phase angle of 90 degrees. By the product of these detection values and the absolute value of the primary voltages, the effective power on the primary side and the reactive power on the primary side are detected. On the other hand, command values of the effective and reactive powers are given. Then, these command values are compared with respective detection values, whereby the secondary current vector is controlled through the effective power adjuster, the reactive power adjuster and the frequency converter so that the compared deviations are equal to zero.

As just described above, the conventional system has been the system to control the secondary current vector of the wound-rotor induction machine in accordance with the command values of the effective and reactive powers. Accordingly, the primary side of the wound-rotor induction machine apparently serves as a current source, so that the primary voltage follows the changes of the system voltage. For this reason, in the event that the system voltage is disturbed due to the system trouble, the conventional system lacks the ability of maintaining the system voltage constant. Particularly, in such a case that one line is cut off due to the one line grounding trouble and is opened, there was an

inconvenience such that the primary voltage is greatly distorted because of the configuration of the control system, so that commutation failure happens in the cycloconverter constituting the frequency converter, or
5 an overvoltage occurs. Accordingly, the conventional system has found limited use of extremely small capacity power generation plants subsidiary to the system, which only impregnate a generated power into the system. Therefore, the conventional system was not applicable to
10 the large capacity power plants having the duty to maintain the system voltage.

SUMMARY OF THE INVENTION

A principal object of the present invention is to provide a wound-rotor induction system having a function
15 of allowing the primary side of the wound-rotor induction machine operating as a generator to apparently serve as a voltage source.

Another object of the present invention is to provide a wound-rotor induction system capable of
20 continuing the power generation in a stabilized manner even at the time of the trouble of the power transmission line or the trouble of the system.

A further object of the present invention is to provide a wound-rotor induction system capable of
25 controlling the primary voltage vector with a high accuracy.

A still further object of the present invention is to provide a wound-rotor induction system capable of reducing the distortion of the primary voltage.

30 To achieve these objects, the wound-rotor induction system according to the present invention is implemented to apply coordinate transformation to an excitation current reference vector corresponding to a primary interlinkage magnetic flux vector reference value and a
35 primary current vector so that they exist in the same coordinate system, thereafter to control a secondary current vector so that a primary linkage magnetic flux

vector is in correspondence with the primary interlinkage magnetic flux vector reference value, thereby allowing the primary side of the wound-rotor induction machine to apparently serve as a voltage source.

BRIEF DESCRIPTION OF THE DRAWINGS

5

In the drawings:

Fig. 1 is a schematic view for explaining the function of the wound-rotor induction machine;

Fig. 2 is a fundamental vector diagram of the wound-
10 rotor induction machine;

Fig. 3 is a fundamental vector diagram for explaining the principle for control of the primary interlinkage magnetic flux vector of the wound-rotor induction machine;

15 Fig. 4 is a block diagram showing an embodiment of a wound-rotor induction system according to the present invention;

Fig. 5 is a block diagram showing an example of the circuit configuration of an angular frequency detector;

20 Fig. 6 is a block diagram showing an example of the circuit configuration of a vector divider;

Fig. 7 is a block diagram showing an example of the circuit configuration of a vector multiplier;

Fig. 8 is a block diagram showing an example of the
25 circuit configuration of a coefficient multiplier and a vector subtracter;

Fig. 9 is a vector diagram for explaining the operation of the apparatus shown in Fig. 4;

Fig. 10 is a block diagram showing a second
30 embodiment of a wound-rotor induction system according to the present invention;

Fig. 11 is a block diagram showing a third embodiment of a wound-rotor induction system according to the present invention;

35 Fig. 12 is a vector diagram for explaining the operation of the system shown in Fig. 11;

Fig. 13 is a block diagram showing a fourth embodiment of a wound-rotor induction system according to the present invention; and

Figs. 14 and 15 show waveforms of the primary and secondary currents in the balanced and unbalanced conditions of the wound-rotor induction machine.

DETAILED DESCRIPTION OF THE INVENTION

Fig. 1 is a schematic diagram for explaining the function of a wound-rotor induction machine. In this figure, 1W and 2W denote primary and secondary windings, respectively. It is assumed that a primary current vector produced by the current flowing in the U-, V- and W-phases of the primary winding is designated by i_1 , and a secondary current vector produced by the current flowing in the u-, v- and w-phases of the secondary winding is designated by i_2 . It is further assumed that self-inductances of the primary and the secondary windings 1W and 2W are respectively represented with L_1 and L_2 , a mutual inductance between the primary and secondary windings 1W and 2W is represented with M , angular frequencies on the primary and secondary sides are respectively represented with ω_1 and ω_2 , and a rotational angular frequency of the secondary winding 2W (rotor) is represented with ω_r . These angular frequencies have a relationship expressed by the following equation:

$$\omega_1 = \omega_r + \omega_2 \quad \dots\dots\dots (1).$$

Fig. 2 is a vector diagram showing the relationship which holds in connection with primary and secondary current vectors i_1 and i_2 and the primary voltage vector v_1 . The primary interlinkage magnetic flux vector ϕ_1 interlinking with the primary winding 1W is expressed by the following equation:

$$\phi_1 = i_1 L_1 + i_2 M \quad \dots\dots\dots (2).$$

The primary voltage vector v_1 is expressed as follows:

$$v_1 = (d/dt)\phi_1 \quad \dots\dots\dots (3).$$

5

Accordingly, for controlling the primary voltage vector v_1 , it is seen that it is sufficient to control the primary interlinkage magnetic flux vector ϕ_1 .

Then, the relational equation of how to control the
10 secondary current vector i_2 for controlling the primary interlinkage magnetic flux vector ϕ_1 will be derived. From the equation (2), the secondary current vector i_2 is expressed as follows:

$$15 \quad i_2 = (\phi_1/M) - (L_1/M)i_1 \quad \dots\dots\dots (4).$$

Assuming that command values of the secondary current vector and the secondary interlinkage magnetic flux vector are respectively represented with i_2^* and ϕ_1^* ,
20 when i_2 and ϕ_1 in the equation (4) are respectively replaced by i_2^* and ϕ_1^* , the following relationship holds:

$$i_2^* = (\phi_1^*/M) - (L_1/M)i_1 \quad \dots\dots\dots (5).$$

25

When it is assumed that control is effected so that i_2 always becomes equal to i_2^* , the following relationship holds:

$$30 \quad i_2 \doteq i_2^* \quad \dots\dots\dots (6).$$

From the above equations (4), (5) and (6), the right side of the equation (4) is expressed as follows:

$$35 \quad (\phi_1/M) - (L_1/M)i_1 \doteq (\phi_1^*/M) - (L_1/M)i_1 \quad \dots(7).$$

From the equation (7), the following relationship holds:

$$\phi_1 \doteq \phi_1^* \dots\dots\dots (8).$$

Accordingly, when the command value ϕ_1^* of the primary
 5 interlinkage magnetic flux vector is given, by obtaining
 the command value i_2^* of the secondary current vector
 using the equation (5) to control the secondary current
 vector i_2 with the command value i_2^* being as reference,
 it is possible to effect a control such that the primary
 10 interlinkage magnetic flux vector ϕ_1 always becomes equal
 to the command value ϕ_1^* . The equation (5) is indicated
 by the vector diagram of Fig. 3.

First Embodiment

An embodiment in which the primary interlinkage
 15 magnetic flux vector ϕ_1 is controlled for functioning the
 wound-rotor induction machine 1 as a voltage source in
 accordance with the equations stated above will be
 explained with reference to Fig. 4. It is to be noted
 that when the secondary current vector command value i_2^*
 20 is obtained using the equation (5), it is required to
 apply coordinate transformation to the primary
 interlinkage magnetic flux command value ϕ_1^* and the
 primary current vector i_1 so that they exist in the same
 coordinate system. In this embodiment, an explanation
 25 will be made in connection with the case of applying
 coordinate transformation to both values so that they
 exist in the coordinate system on the secondary side of
 the wound-rotor induction machine 1. For the coordinate
 system, there is employed a Cartesian or rectangular
 30 coordinate system such that the direction of the magnetic
 flux axis is assumed as d-axis and the axis leading the
 d-axis by a phase angle of 90 degrees is assumed as q-
 axis. For performing transformation of the coordinate
 system, it is required to obtain the angular frequency ω_1
 35 on the primary side and the rotational angular frequency
 ω_r of the secondary winding.

In Fig. 4, the power circuit comprises the wound-rotor induction machine 1, a frequency converter 2, a transmission line 3, and a system bus 4. The primary winding terminal of the wound-rotor induction machine 1 is connected to the system bus 4 through the transmission line 3, and is also connected to the secondary winding terminal of the wound-rotor induction machine 1 through the frequency converter 2 (e.g., comprised of a cycloconverter).

For detecting the primary current of the wound-rotor induction machine 1, a primary current detector 5 is provided. For detecting the secondary current thereof, a secondary current detector 6 is provided. For detecting the angular frequency ω_1 of the primary voltage, an angular frequency detector 7 is provided. In addition, for detecting the rotational angular frequency ω_r of the rotor, a rotational angular frequency detector 9 is provided.

The angular frequency detector 7 may be constituted with, e.g., a phase locked loop as shown in Fig. 5. The device shown in Fig. 5 comprises a phase detector 32 for detecting the phase of the primary side voltage of the wound-rotor induction machine 1, a subtracter 33, an amplifier and filter 34, a two-phase sine wave generator 35, and a phase detector 36 for detecting the phase of the output voltage of the two-phase sine wave generator 35. In this device, output signals of the both phase detectors 32 and 36 are introduced into the subtracter 33 so that the phase of the primary side voltage detected by the phase detector 32 and the phase of the two-phase sine wave detected by the phase detector 36 are always equal to each other, whereby the output frequency of the two-phase sine wave generator 35 is controlled so that the difference therebetween, i.e., the phase deviation becomes equal to zero.

With the configuration stated above, two-phase signals expressed by the following equations are obtained as the output of the angular frequency detector 7:

$$\begin{aligned} 5 \quad q\omega_1 &= \cos(\omega_1 t) & \dots\dots\dots & (9), \text{ and} \\ d\omega_1 &= \sin(\omega_1 t) & \dots\dots\dots & (10). \end{aligned}$$

The rotational angular frequency ω_r of the secondary winding is detected by the rotational angular frequency
10 detector 9. Thus, two-phase signals expressed by the following equations are obtained:

$$\begin{aligned} q\omega_r &= \cos(\omega_r t) & \dots\dots\dots & (11), \text{ and} \\ d\omega_r &= \sin(\omega_r t) & \dots\dots\dots & (12). \end{aligned}$$

15

A vector divider 12 performs the computation expressed by the following equations using the output of the angular frequency detector 7 and the output of the rotational frequency detector 9:

20

$$\begin{aligned} q\omega_2 &= q\omega_1 \times q\omega_r + d\omega_1 \times d\omega_r \\ &= \cos(\omega_1 t) \cos(\omega_r t) + \sin(\omega_1 t) \sin(\omega_r t) \\ &= \cos(\omega_1 t - \omega_r t) = \cos(\omega_2 t) \quad \dots \quad (13), \end{aligned}$$

and

25

$$\begin{aligned} d\omega_2 &= d\omega_1 \times q\omega_r - q\omega_1 \times d\omega_r \\ &= \sin(\omega_1 t) \cos(\omega_r t) - \cos(\omega_1 t) \sin(\omega_r t) \\ &= \sin(\omega_1 t - \omega_r t) = \sin(\omega_2 t) \quad \dots \quad (14). \end{aligned}$$

Fig. 6 shows an example of the actual configuration
30 of the vector divider 12 for performing the computation of the above equations (13) and (14). The configuration shown in this figure includes multipliers 37 to 40, and adders 41 and 42 wherein these circuit components are arranged so as to realize the computation expressed by
35 the above equations (13) and (14).

On the other hand, the primary current vector i_1 of

detector 8. Thus, two-phase signals expressed by the following equations are obtained as its output:

$$I_{1q}(\omega_1) = I_1 \cos(\omega_1 t + \theta_1) \quad \dots\dots\dots (15),$$

5 and

$$I_{1d}(\omega_1) = I_1 \sin(\omega_1 t + \theta_1) \quad \dots\dots\dots (16),$$

where I_1 denotes an amplitude of the primary current vector i_1 and θ_1 denotes a phase angle of the primary
10 current vector with respect to the q-axis.

Then, outputs of the detectors 8 and 9 are input to a vector divider 14 to perform the computation expressed by the following equations:

$$\begin{aligned} 15 \quad I_{1q}(\omega_2) &= I_{1q}(\omega_1) \times q\omega_r + I_{1d}(\omega_1) \times d\omega_r \\ &= I_1 \cos(\omega_1 t + \theta_1) \cos(\omega_r t) \\ &\quad + I_1 \sin(\omega_1 t + \theta_1) \sin(\omega_r t) \\ &= I_1 \cos(\omega_1 t - \omega_r t + \theta_1) \\ &= I_1 \cos(\omega_2 t + \theta_1) \quad \dots\dots (17), \end{aligned}$$

20 and

$$\begin{aligned} I_{1d}(\omega_2) &= I_{1d}(\omega_1) \times q\omega_r - I_{1q}(\omega_1) \times d\omega_r \\ &= I_1 \sin(\omega_1 t + \theta_1) \cos(\omega_r t) \\ &\quad - I_1 \cos(\omega_1 t + \theta_1) \sin(\omega_r t) \\ &= I_1 \sin(\omega_1 t - \omega_r t + \theta_1) \\ 25 \quad &= I_1 \sin(\omega_2 t + \theta_1) \quad \dots\dots (18). \end{aligned}$$

The equations (17) and (18) are similar to the above-mentioned equations (13) and (14) and the computation can be performed using the vector divider of
30 the configuration shown in Fig. 6.

The reference value ϕ_1^* of the primary interlinkage magnetic flux vector is composed of both axial components expressed by the following equations:

$$35 \quad \phi_{1q}^* = -\phi_1^* \sin \theta_0 \quad \dots\dots (19),$$

and

$$\phi_{1d}^* = \phi_1^* \cos \theta_0 \quad \dots\dots (20),$$

where θ_0 denotes a phase angle of the primary interlinkage magnetic flux vector with respect to the d-axis. This reference value is multiplied by $1/M$ at the
 5 coefficient multiplier 11. In this instance, since M represents the mutual inductance between the primary and secondary windings, the output of the coefficient multiplier 11 is expressed by the following equations:

$$\begin{aligned} 10 \quad \phi_{1q}^*/M &= -(\phi_1^*/M)\sin\theta_0 \\ &= -I_0^*\sin\theta_0 = I_{0q}^* \quad \dots\dots (21), \end{aligned}$$

and

$$\begin{aligned} \phi_{1d}^*/M &= (\phi_1^*/M)\cos\theta_0 \\ &= I_0^*\cos\theta_0 = I_{0d}^* \quad \dots\dots (22) \end{aligned}$$

15

where I_0^* denotes an amplitude of the excitation current reference vector and θ_0 denotes a phase angle thereof with respect to the d-axis. by inputting the signals expressed by the equations (21) and (22) from the
 20 coefficient multiplier 11 and the output of the vector divider 12, i.e., the signals expressed by the equations (13) and (14) to the vector divider 13, the following computation expressed by the following equations is performed:

25

$$\begin{aligned} I_{0q}^*(\omega_2) &= I_{0q}^*xq\omega_2 - I_{0d}^*xd\omega_2 \\ &= -I_0^*\sin\theta_0\cos(\omega_2t) - I_0^*\cos\theta_0\sin(\omega_2t) \\ &= -I_0^*\sin(\omega_2t + \theta_0) \quad \dots\dots (23), \end{aligned}$$

and

$$\begin{aligned} 30 \quad I_{0d}^*(\omega_2) &= I_{0q}^*xd\omega_2 + I_{0d}^*xq\omega_2 \\ &= -I_0^*\sin\theta_0\sin(\omega_2t) + I_0^*\cos\theta_0\cos(\omega_2t) \\ &= I_0^*\cos(\omega_2t + \theta_0) \quad \dots\dots (24). \end{aligned}$$

The computation expressed by the above equations
 35 (23) and (24) may be performed using a vector multiplier 13 shown in Fig. 7. This vector multiplier includes

Thus, the primary current vector i_1 which has been subjected to coordinate transformation so that it exists in the coordinate system on the secondary side is obtained at the output side of the vector divider 14 and
 5 the excitation current reference vector i_0^* which has been subjected to coordinate transformation so that it exists in the coordinate system on the secondary side is obtained at the output side of the vector multiplier 13. These signals are introduced into a coefficient
 10 multiplier 15 and a vector subtracter 16 to effect computation using the configuration shown in Fig. 8. this circuit configuration includes coefficient multipliers 49 and 50 for multiplication of the coefficient of L_1/M , each corresponding to the
 15 coefficient multiplier 15 shown in Fig. 4, and adders 51 and 52 each corresponding to the vector subtracter 16 shown in Fig. 4.

The computation expressed by the following equations is performed using the computing circuit shown in Fig. 8:

20

$$\begin{aligned} I_{2q}^*(\omega_2) &= I_{0q}^*(\omega_2) - (L_1/M)I_{1q}(\omega_2) \\ &= -I_0^*\sin(\omega_2 t + \theta_0) \\ &\quad - (L_1/M)I_1\cos(\omega_2 t + \theta_1) \quad \dots\dots (25), \end{aligned}$$

and

25

$$\begin{aligned} I_{2d}^*(\omega_2) &= I_{0d}^*(\omega_2) - (L_1/M)I_{1d}(\omega_2) \\ &= I_0^*\cos(\omega_2 t + \theta_0) \\ &\quad - (L_1/M)I_1\sin(\omega_2 t + \theta_1) \quad \dots\dots (26). \end{aligned}$$

The equations (25) and (26) are expressed by the
 30 vector diagram of Fig. 9 in the coordinate system rotating at the angular frequency ω_2 . In this figure, the vector sum of $(L_1/M)I_1$ and I_2^* is equal to I_0^* . Accordingly, when the reference value I_2^* of the secondary current I_2 is computed using the equations (25)
 35 and (26) with respect to the value of an arbitrary primary current I_1 to effect a control such that I_2 always becomes equal to I_2^* , the excitation current I_2 is

controlled so that it becomes equal to the reference value I_0^* .

Thus, the reference value i_2^* of the secondary current vector is obtained as the output of the vector subtracter 16 in the form of the two-phase signals. Accordingly, this reference value i_2^* may be converted to three-phase reference values using a two-phase/three-phase converter 17 to compare them with currents of u-, v- and w-phases on the secondary side of the wound-rotor induction machine 1 detected by the current detector 6 at respective subtracters 18, 19 and 20 to effect a secondary current control through current control circuits 21, 22 and 23 and the frequency converter 2 so that their deviations become equal to zero.

By controlling the excitation current vector in accordance with the reference value in a manner stated above, it is possible to control the primary interlinkage magnetic flux vector in accordance with the reference value. Accordingly, the secondary current is controlled so that the primary voltage of the wound-rotor induction machine 1 is always kept constant with respect to the change of the load or the like. Thus, the induction machine 1 is controlled so that it serves apparently as a voltage source. Particularly in the case that the load is unbalanced or one line is opened, an antiphase or negative-phase current would flow into the primary side. However, assuming that the response of the secondary current control system is sufficiently fast, control operation is performed so that the magnetomotive force based on the antiphase current from the primary side is cancelled with the secondary current to remove the influence of the magnetomotive force on the excitation current. Thus, the distortion of the primary voltage based on the antiphase current is suppressed, thus making it possible to conduct running with a good characteristic.

It has been described that the reference value of the primary interlinkage magnetic flux vector and the primary current vector are subjected to coordinate transformation so that they exist in the coordinate system on the secondary side to effect a control. The gist of the present invention resides in that the secondary current vector is controlled on the basis of the difference vector between the excitation current reference vector corresponding to the reference value of the primary interlinkage magnetic flux vector and the primary current vector. Accordingly, there may be employed a method to obtain the difference vector in an arbitrary coordinate system except for the above to effect the above-mentioned control.

15 Second Embodiment

Fig. 10 shows an embodiment adapted for causing the primary side of the wound-rotor induction machine to function apparently as a voltage source and for making it possible to stably continue power generation still at the time of trouble of the transmission line or trouble of the system. In this embodiment, in place of the angular frequency detector 7 shown in Fig. 4, a system angular frequency reference value generator 7A is provided. Other circuit components are the same as those in Fig. 4. The system angular frequency reference value generator 7A functions to generate a system angular frequency reference value ω_1^* on the primary side of the wound-rotor induction machine 1 on the basis of the angular frequency of the system bus 4. A generator constituted with, e.g. a phase locked loop as shown in Fig. 5 may be used for this purpose. The computations carried out in the vector divider 12 and the vector multiplier 13 are substantially the same as those in Fig. 4.

This embodiment is characterized in that the reference of the primary side angular frequency is obtained by using the system angular frequency reference value generator 7A. Accordingly, even in the case that

the transmission line 3 undergoes grounding trouble etc., so that the voltage on the input side of the wound-rotor induction machine is disturbed, it is possible to stably maintain the power generation. Particularly, even in the case that the three-phase lines are opened by an interrupter at the output terminal of a power generation plant due to the three-phase trouble etc., it is possible to continue power generation while generating a voltage synchronous with the system at any time. Thus, still when the system is powered again, power transmission can be initiated without disturbing the system. In the case of using the phase locked loop shows in Fig. 5 for the system angular frequency reference value generator, when a setting is made such that the time constant of the filter included in the circuit component 34 is sufficiently large, it is possible to stably control a voltage at the terminal of a power generation plant even at the time of disturbance of the system, thus advantageously permitting the voltage fluctuation of the system to be suppressed.

Third Embodiment

Fig. 11 shows an embodiment adapted for causing the primary side of the wound-rotor induction machine 1 to function apparently as a voltage source and for making it possible to control the primary voltage vector with high efficiency. This embodiment is characterized in that the excitation current reference vector i_0^* is obtained on the basis of the primary side voltage vector of the wound-rotor induction machine 1.

It is now assumed that excitation current reference vectors expressed by the following equations are obtained as the output of a PI control system 29:

$$i_{0q}^* = -I_1^* \sin \theta_0 \quad \dots \quad (27),$$

35 and

$$I_{0d}^* = I_0^* \cos \theta_0 \quad \dots \quad (28),$$

where I_0^* denotes an amplitude of the excitation current reference vector and θ_0 denotes a phase angle thereof with respect to the d-axis. These equations (27) and (28) correspond to the output signals of the coefficient multiplier 11 having been explained in the embodiment shown in Fig. 4, i.e., the equations (21) and (22).

Fig. 12 is a vector diagram showing the principle of this embodiment. In this figure, v_1^* is a reference value of the primary voltage vector input to a vector subtracter 27 in Fig. 11. The primary voltage vector $v_1(\omega_1)$ of the wound-rotor induction machine 1 is detected by a primary voltage vector detector 25. The two-phase signal having angular frequency of ω_1 of the primary voltage is obtained as its output. Then, coordinate transformation is conducted by a vector divider 26 using a two-phase unit sine wave having angular frequency of ω_1 to obtain a two-phase signal v_1 having angular frequency of zero as its output. The two-phase signal v_1 thus obtained is input to a vector subtracter 27 to obtain a vector Δv_1^* as the difference between the two-phase signal v_1 and the reference value v_1^* . As seen from Fig. 12, the vectors i_0^* , i_0 and Δi_0^* have a relationship such that they lag vectors v_1^* , v_1 and Δv_1^* by a phase angle of 90 degrees, respectively. Accordingly, the output Δv_1^* of the vector subtracter 27 is delayed by a phase angle of 90 degrees using a phase shifter 28 to obtain the difference vector Δi_0^* , thereafter to amplify it using the PI control system 29, thus to control the excitation current so that the difference vector Δi_0^* becomes equal to zero. Thus, it is possible to control the primary voltage vector of the wound-rotor induction machine 1 so that it always becomes equal to its reference value v_1^* . The PI control system 29 may be constituted by applying known proportional integration control circuits to d-axis and q-axis components, respectively.

Fourth Embodiment

Fig. 13 shows an embodiment adapted for allowing the primary side of the wound-rotor induction machine 1 to function as a voltage source and for permitting the distortion of the primary voltage to be reduced. In this embodiment, there provided reactors 30 connected in series between the secondary terminals of the wound-rotor induction machine 1 and the output terminals of the frequency converters 2, and capacitors 31 connected in shunt with the secondary terminals of the wound-rotor induction machine 1. Other circuit components are the same as those in Fig. 4.

In the case that the load becomes unbalanced or one line is opened, an antiphase current is caused to flow into the primary side of the wound-rotor induction machine 1. For this reason, fast response is required for the secondary current control system. Figs. 14 and 15 show waveforms of the primary and secondary currents of the wound-rotor induction machine 1. Fig. 14 shows waveforms of primary currents i_{1u} , i_{1v} and i_{1w} of respective U-, V- and W-phases when the load is in a balanced condition and secondary currents i_{2u} , i_{2v} and i_{2w} corresponding thereto in the case of the running at slip of 8%. When the frequency of the primary current is 50 Hz, the frequency of the secondary current is 4 Hz. Fig. 15 shows waveforms of primary currents of respective U-, V- and W-phases when the load is in an unbalanced condition and secondary currents corresponding thereto. More particularly, Fig. 15 shows waveforms of currents which should be caused to flow on the secondary side, i.e., secondary currents i_{2u} , i_{2v} and i_{2w} , in order to maintain the excitation current constant and not to produce distortion of the primary voltage. Namely, the term of "the secondary current" in this case means the secondary current required to cancel, from the secondary side, the magnetomotive force based on the antiphase current flowing into from the primary side. When the frequency of the primary side is 50 Hz and slip is 8%

the frequency of the antiphase component on the secondary side becomes equal to 104 Hz. When the capacity of the wound-rotor induction machine 1 is large, the capacity of the frequency converter 2 is also large, so that there is
5 nothing for it to necessarily use the cycloconverter of the separate excitation system. As well known, the output frequency of the cycloconverter of the separate excitation system is equal to one half to one third of the power supply frequency, with the result that the
10 current control of 104 Hz is essentially impossible. Accordingly, since the magnetomotive force based on the antiphase current flowing into from the primary side cannot be sufficiently cancelled, the primary voltage is distorted to great extent, giving rise to an
15 inconvenience such that commutation failure occurs in the cycloconverter and the system is down. To avoid this, in this embodiment, capacitors 31 are connected to the secondary terminals of the wound-rotor induction machine 1. The electrostatic capacity of the capacitor 31 is
20 selected so that it exhibits a sufficiently low impedance with respect to the antiphase frequency component induced on the basis of the antiphase frequency of the power system. Thus, since most of the antiphase components (components of 104 Hz) in the secondary currents shown in
25 Fig. 15 flow into the capacitors 31, even if the response in the current control of the frequency converter 2 is not so fast, the distortion of the primary voltage based on the antiphase current is sufficiently suppressed, thus making it possible to stably continue running.

30 It has been described in the above-mentioned embodiments that the wound-rotor induction machine 1 operates as a generator. In addition, the present invention is applicable to the case that the induction machine 1 operates as a motor.

CLAIMS:

1. An induction machine system characterized by:
 - a wound-rotor induction machine (1) connected at its primary side to a power system;
 - a frequency converter (2) for controlling a secondary current of said wound-rotor induction machine;
 - setting means (11; 25 ~ 29) for setting an excitation current reference vector with respect to said wound-rotor induction machine;
 - means (8) for detecting a primary current vector of said wound-rotor induction machine;
 - coordinate transformation means (9, 12, 13, 14, 15) for applying coordinate transformation to said excitation current reference vector and said primary current vector so that they exist in the same coordinate system;
 - means (16) for preparing a secondary current reference vector on the basis of said primary current vector and said excitation current reference vector which have been subjected to the coordinate transformation by said coordinate transformation means;
 - means (6) for detecting a secondary current vector of said wound-rotor induction machine; and
 - current control means (18, 19, 20, 21, 22, 13) for controlling said frequency converter so that said secondary current vector is in correspondence with said secondary current reference vector.

2. An induction machine system as set forth in claim 1, characterized in that said setting means comprises means for providing a primary interlinkage magnetic flux vector reference value of said wound-rotor induction machine, and means (11) for transforming said primary interlinkage magnetic flux to said excitation current reference vector.

3. An induction machine system as set forth in claim 1, characterized by means (7) for detecting a primary voltage angular frequency of said wound-rotor induction machine, and means (9) for detecting a rotational angular frequency of the rotor of said wound-rotor induction machine, whereby said coordinate transformation means applies coordinate transformation to said primary current vector and said excitation current reference vector so that they exist in the same coordinate system on the basis of said primary voltage angular frequency and said rotational angular frequency of said rotor.

4. An induction machine system as set forth in claim 1, characterized by means (7A) for detecting an angular frequency reference value of said power system to which said wound-rotor induction machine is connected, and means (9) for detecting a rotational angular frequency of the rotor of said wound-rotor induction machine, whereby said coordinate transformation means applies said primary current vector and said excitation current reference vector so that they exist in the same coordinate system on the basis of said angular frequency reference value of said power system and said rotational angular frequency of said rotor.

5. An induction machine system as set forth in claim 1, characterized in that said setting means comprises means for providing a reference value of a primary voltage vector of said wound-rotor induction machine, means (25) for detecting the primary voltage vector of said wound-rotor induction machine, and means (27, 28) for producing said excitation current reference vector so that a vector indicative of a difference between said reference value of said primary voltage vector and the detection value thereof.

6. An induction machine system as set forth in claim 1, characterized by a reactor (30) connected in series between an output terminal of said frequency converter (2) and a secondary terminal of said wound-rotor induction machine (1), and a capacitor (31) connected in shunt with said secondary terminal of said wound-rotor induction machine to exhibit a sufficiently low impedance with respect to an antiphase frequency component induced on the secondary side of said wound-rotor induction machine on the basis of an antiphase frequency of said power system to which said wound-rotor induction machine is connected.

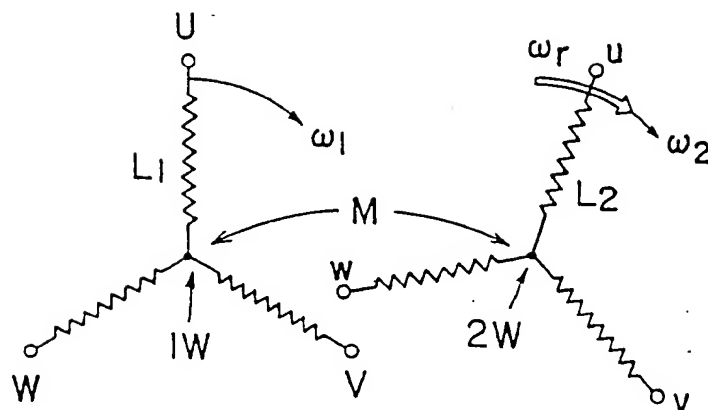


FIG. 1

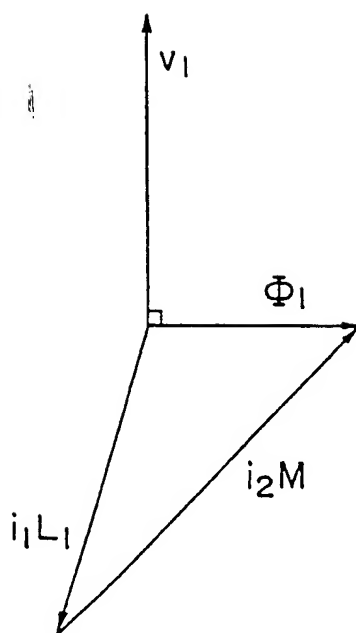


FIG. 2

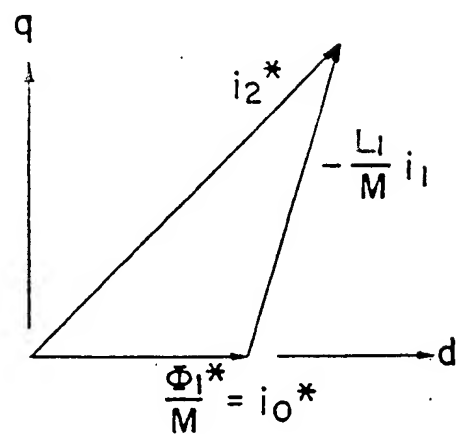


FIG. 3

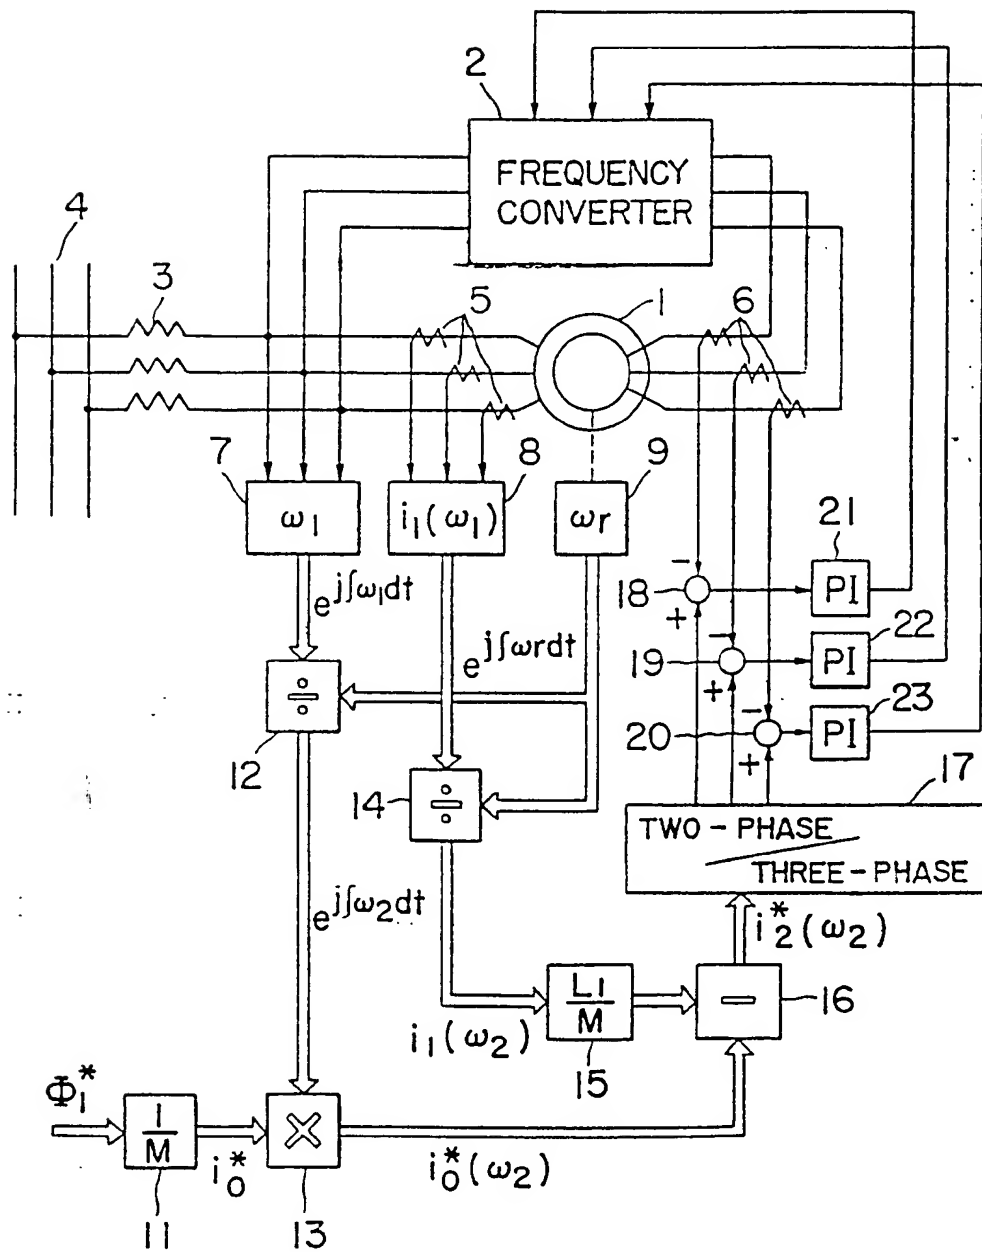


FIG. 4

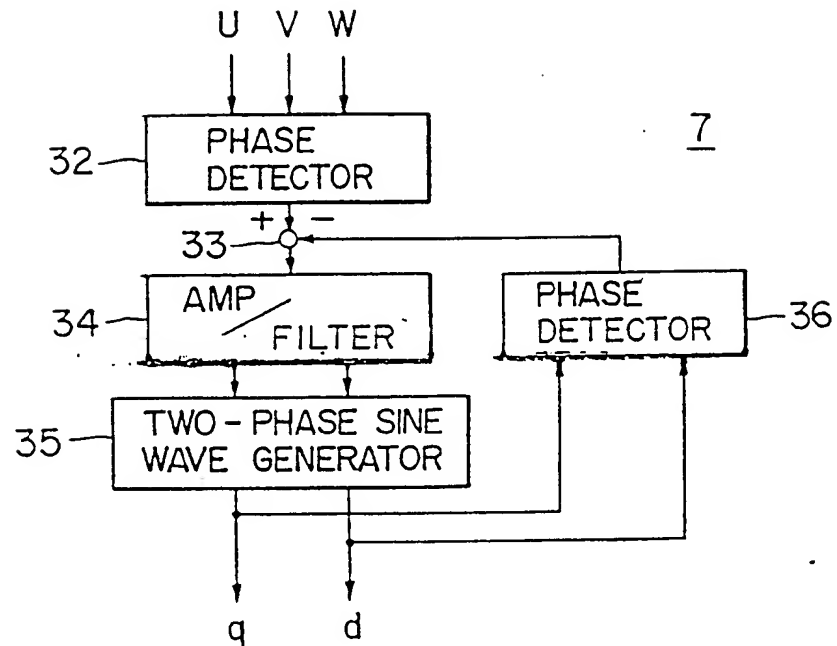


FIG. 5

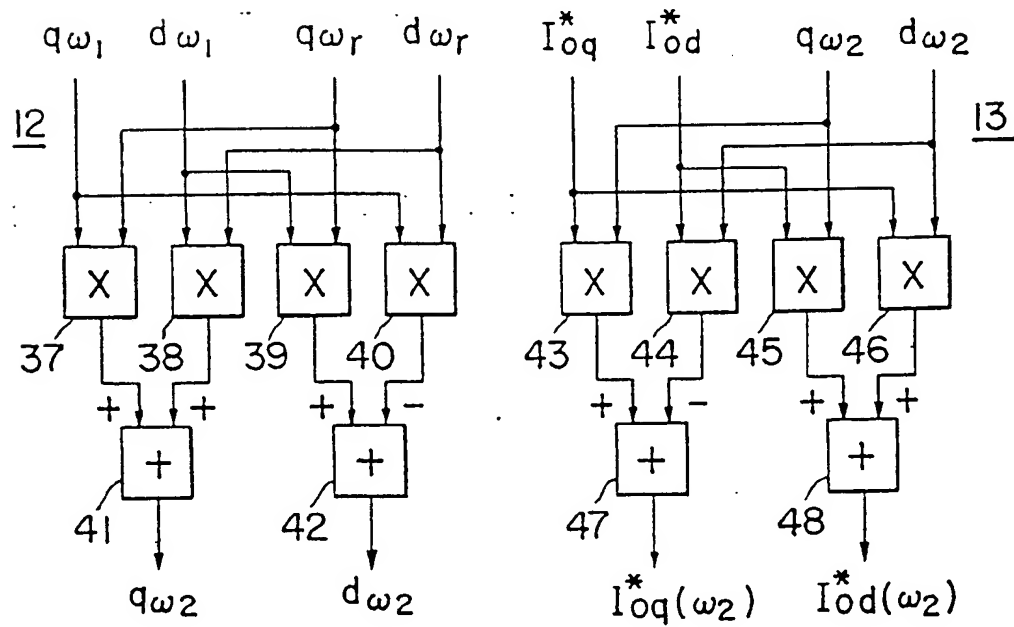


FIG. 6

FIG. 7



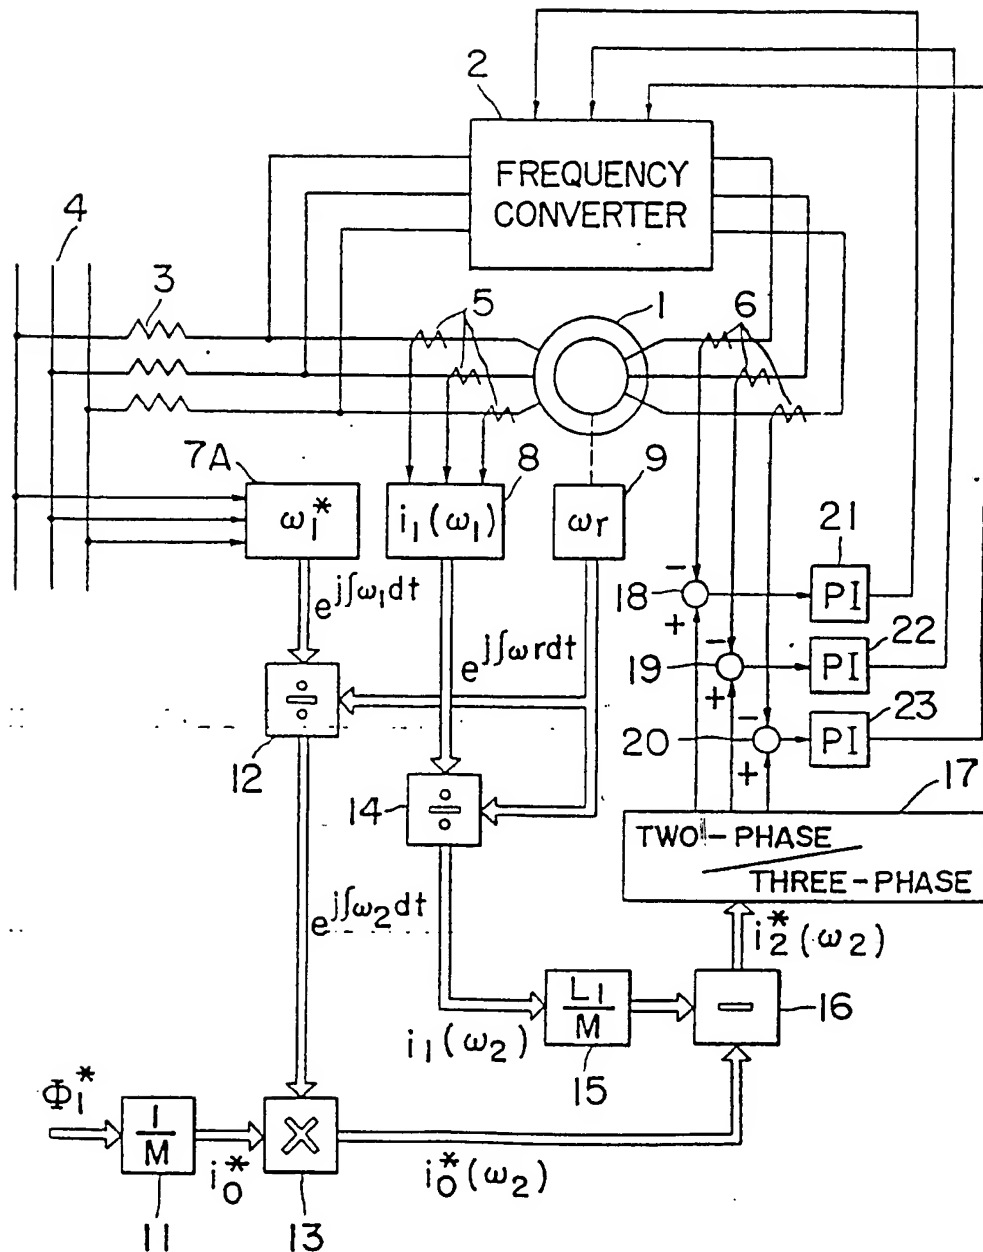


FIG. 10



EUROPEAN PATENT APPLICATION

② Application number: 87109868.7

⑤ Int. Cl.³: H 02 P 9/04
H 02 P 9/10

②② Date of filing: 08.07.87

③① Priority: 11.07.86 JP 163458/86

④3 Date of publication of application:
20.01.88 Bulletin 88/3

88 Date of deferred publication of search report: 19.04.89

⑧ Designated Contracting States:
CH DE FR GB LI SE

⑦ Applicant: KABUSHIKI KAISHA TOSHIBA
72, Horikawa-cho Saiwai-ku
Kawasaki-shi Kanagawa-ken 210(JP)


(72) Inventor: Uchino, Hiroshi
615, Yokokawa-Cho
Hachioji-Shi Tokyo-To(JP)

72 Inventor: Shimamura, Takeo
1994-469, Hazama-Machi
Hachioji-Shi Tokyo-To(JP)

**74) Representative: Behn, Klaus, Dipl.-Ing.
Patentanwalt Lindenberg 34
D-8134 Pöcking bei München(DE)**

⑤④ Induction machine system.

57 An induction system of the invention is adapted to apply coordinate transformation to the excitation current reference vector corresponding to the primary interlinkage magnetic flux vector reference value and the primary current vector so that they exist in the same coordinate system, thereafter to control the secondary current vector so that the primary interlinkage magnetic flux vector is in correspondence with the primary interlinkage magnetic flux vector, thereby allowing the primary side of the wound-rotor induction machine to function apparently as a voltage source.

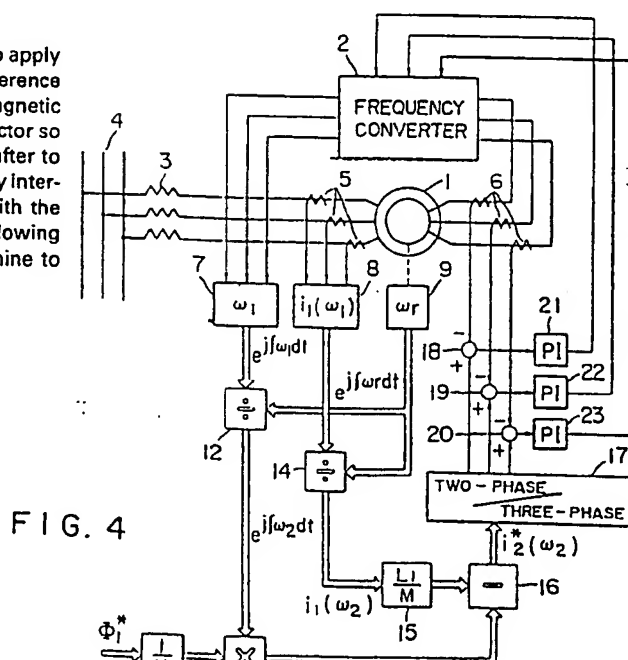

0253294



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 87 10 9868

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.4)
A	DE-A-2845930 (SIEMENS AG) * figure 1 *	1	H02P9/04 H02P9/10 H02P9/42
A	EP-A-141372 (HITACHI LTD) * the whole document *	1	
A	PATENT ABSTRACTS OF JAPAN vol. 6, no. 132 (E-119) 1010 17 July 1982, & JP-A-57 059497 (MEIDENSHA K.K.) * see the whole document *	1	
			TECHNICAL FIELDS SEARCHED (Int. Cl.4)
			H02P F03B
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 16 FEBRUARY 1989	Examiner BEYER F.
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application</p>			

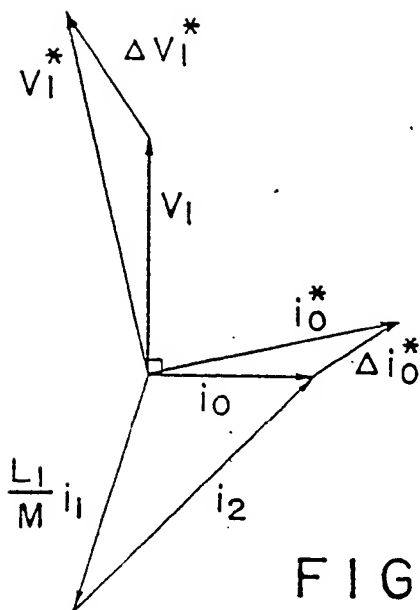


FIG. 12

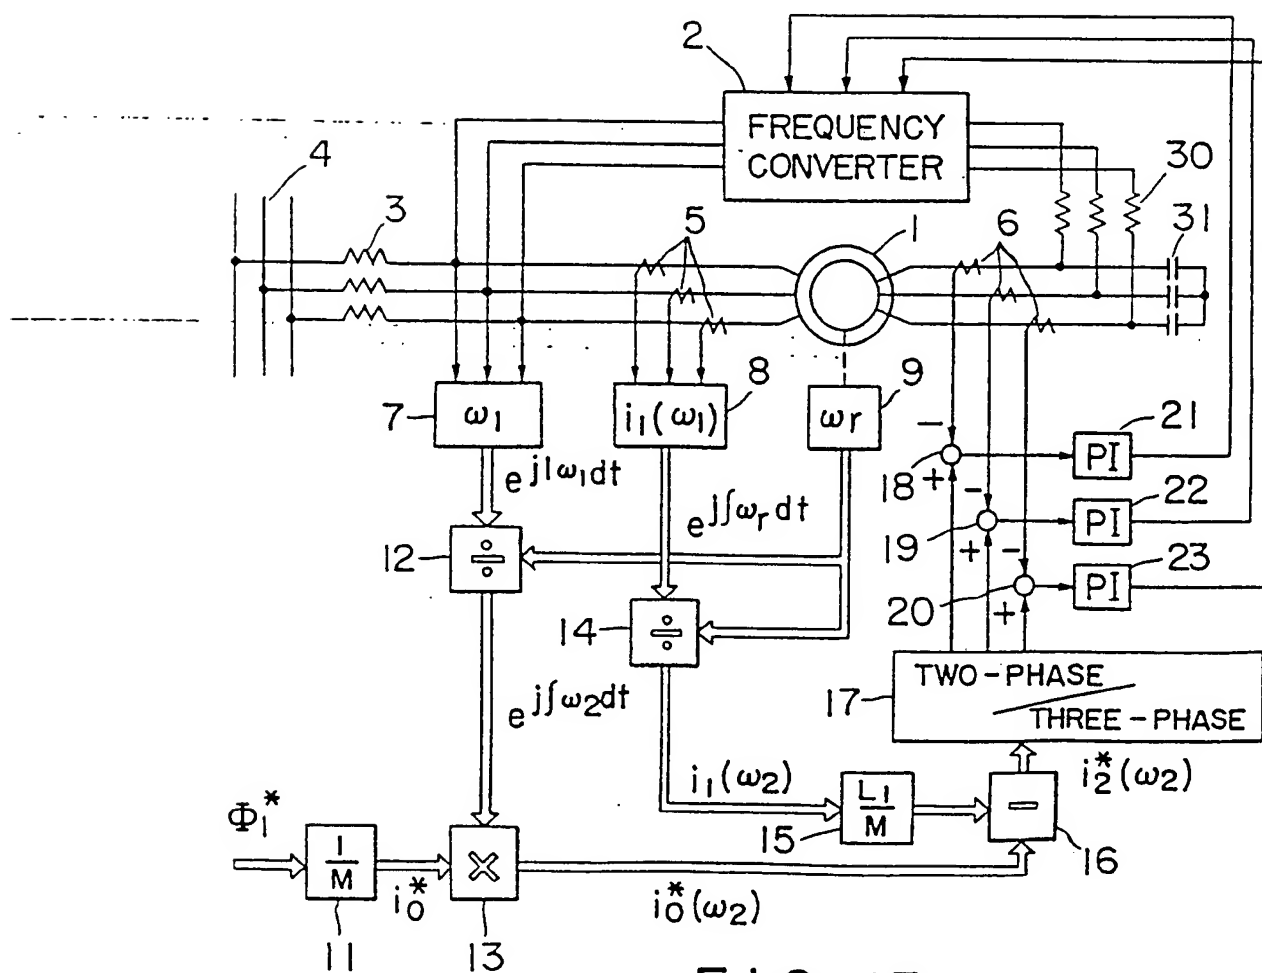


FIG. 13

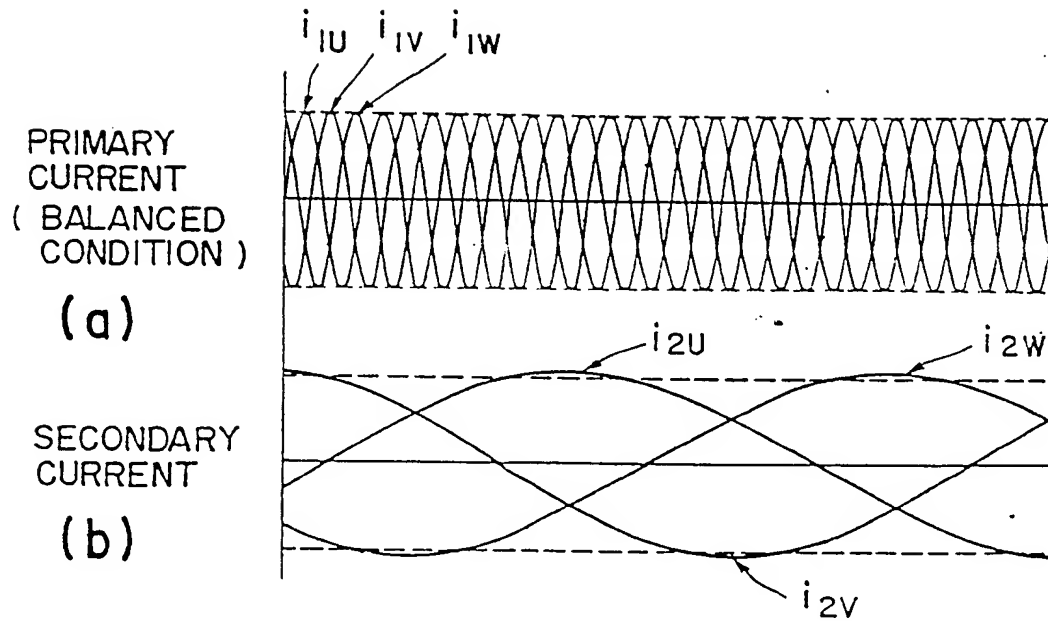


FIG. 14

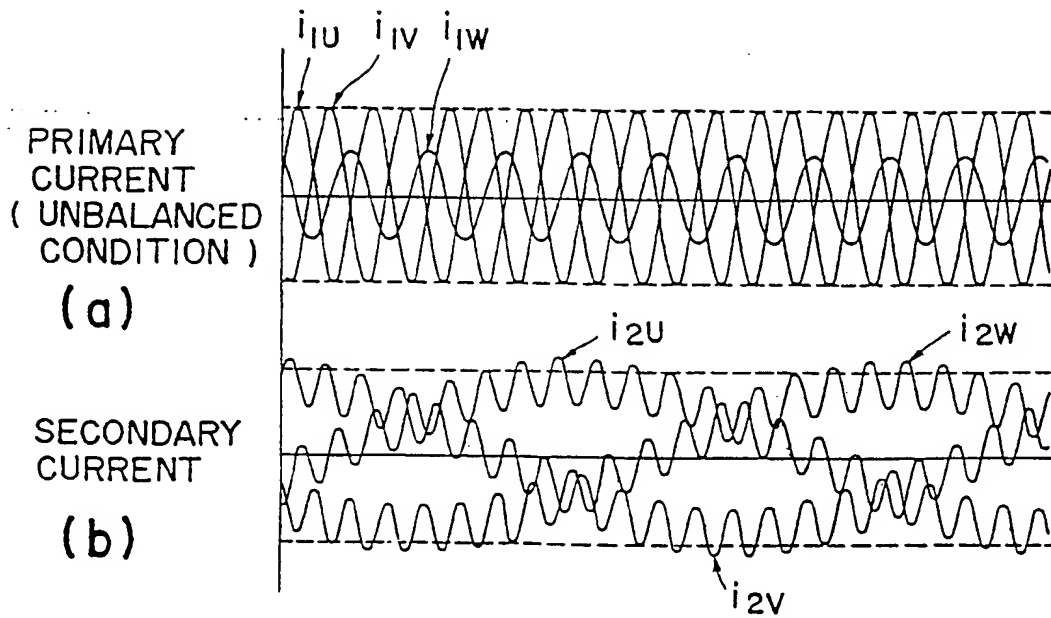


FIG. 15